AM Electricals

Control panel manufacturer, Kolkata — CPRI type-tested, ISO 9001:2008 certified, founder-led since 1991.

34	5,000	13	70 kA / 1s
Years in business	Sqft Kolkata factory	Panel families	MCC / PCC withstand

About

AM Electricals was founded in Kolkata by Ajit Debnath in 1991 to build control panels for Bengal's growing industrial base. 34 years later we still make what we sell, from our own 5,000 sqft factory on Kamardanga Road. Panels are built to IS 8623 (aligned with IEC 61439-2), with CPRI type-tested designs and an ISO 9001:2008 quality process throughout.

Certifications

CPRI — Central Power Research Institute short-circuit withstand strength test, 70 kArms for 1.0 second (verification report, LT switch board, 6000 A). **ISO 9001:2008** — Quality Management System certified.



Tel. No.0755-2586343
Fax No. 0755 – 2587774
Email: cpribpl@sancharnet.in

CENTRAL POWER RESEARCH INSTITUTE
GOVINDPURA : BHOPAL – 462 023

04 NOV 2022

PROVISIONAL REPORT

Test Report No.CPRIBPLSTNBMISC22T0316 Date of test: 02 November 2022

1. **Customer:** M/s A.M. Electricals, Kolkata, West Bengal- 700046
2. **Sample tested:** 415 V, 6000 A, LT Switch Board (Non Extendable)
3. **Serial Number:** AME/70K — **4. Sample Code No.:** STNBMISC22S0892
5. **Type:** Power Cum Motor Control Centre
5.1 **Designation:** Main Distribution Panel
6. **Drawing Number:** AME/TEST/70K SHEET No. 1 OF 3, AME/TEST/70K SHEET No. 2 OF 3 & AME/TEST/70K SHEET No. 3 OF 3
7. **Rating of the Sample:**
7.1 **Rated Voltage :** 415 V — 7.2 **Rated Current :** 6000 A
7.3 **Rated Insulation voltage :** 660 V — 7.4 **No. of phases :** Three phase + Neutral
7.5 **Degree of protection:** - — 7.6 **Busbar Material:** -
7.7 **Rated short time current:** 70 kArms for 1.0 second with initial peak of 154 kApk
8. **Sample tested for the following ratings:**
8.1 **Voltage :** 415 V — 8.2 **Current :** 6000 A
8.3 **Insulation voltage :** 660 V
8.4 **Short time current:** 70 kArms for 1.0 second with initial peak of 154 kApk
9 **Type of test carried out:** Verification of short circuit withstand strength test
10 **Specification followed:** As per customer's requirement and procedure generally followed as per cl.10.11.5.3.3 & 10.11.5.3.5 of IS/IEC 61439-1,2011 & IS/IEC 61439-2, 2011
10.1 **Customer's requirement** Short circuit withstand strength test to be conducted on busbars only.
11 **Test results:**

Oscillogram No.	Short time current in kApk/kArms R	Y	B	Duration in second	Equivalent current for 1.0 second in kArms
CPRIBPLSTNB MISC22T0316S002	71.57	160.27/73.2	70.19	1.0	73.2
(Three phase short circuit withstand strength test conducted on circuit busbars consisting of HBB+VBB+HBB)					
CPRIBPLSTNB MISC22T0316S004	91.6/42.35			1.0	42.35
(Single phase short circuit withstand strength test conducted on neutral & nearest phase of circuit busbars consisting of HBB+VBB+HBB)					


Observations: No abnormality. Fine wire fuse intact. All busbars & supports found intact.
Remarks: After test, the sample withstood HV test at 1.0 kVrms for five second.

TEST ENGINEER — **LABORATORY IN-CHARGE**
This is only a provisional report. The final report alongwith drawings and oscillograms will be issued separately within one month from the date of test.
Central Power Research Institute
Switchgear Testing & Development Station
Govindpura, Bhopal- 462023

On the shopfloor



Panel testing before dispatch

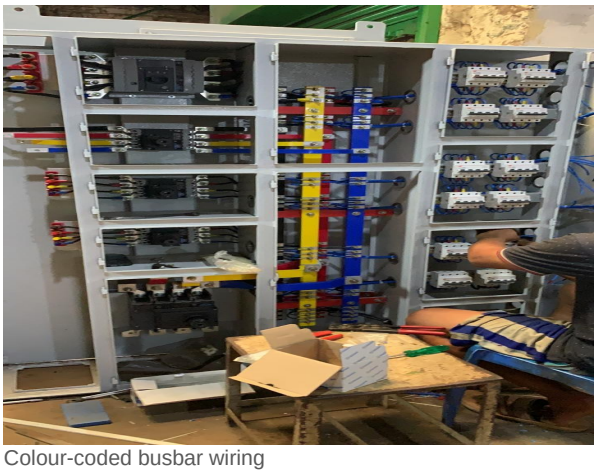

Colour-coded busbar wiring



AMF control panel build



Finished panel, door open

13 panel families

Every panel ships with a BOQ, SLD, GA drawing and FAT report. Built to spec for the site, not pulled off a shelf.

Panel family	Spec
APFC Panels	Thyristor APFC, 25 to 800 kVAR, IEC 61439-2
MCC Panels	Motor Control Centre, IS 8623, 70 kA / 1s withstand
PCC Panels	Power Control Centre, up to 4000 A, IS 8623
AMF & DG Sync Panels	AMF plus DG synchronisation, 10 to 2500 kVA
PLC Automation Panels	Multi-brand PLC panels, any major platform
HVAC Control Panels	BMS-ready HVAC starters, VFD provision
AHU & Metering Panels	AHU starter plus tenant metering, BMS-ready
Industrial Control Desks	Floor or wall-mount desks, IP-55, iron alloy
DG Control Panels	Single-DG monitoring and control, domestic to commercial
Fire Pump Control Panels	Auto plus manual mode, 415 V, industrial-grade
Power Distribution Panels	Modular PDBs for public and industrial distribution
STP / ETP / WTP Panels	Custom control panels for sewage, effluent and water
Custom & Specialised Panels	Burner, boiler, BMB, ash handling. Built to your process

Get in touch

Phone	+91-7003707013
WhatsApp	Click to chat — wa.me/917003707013
Email	amelectricals@yahoo.co.in
Factory	7S Kamardanga Road, Near Anandapalit, Kolkata 700046, West Bengal
Website	amelectricals.co.in